

A Multi-Year Grey Literature Review on AI-assisted Test Automation

Filippo Ricca^{a,*}, Alessandro Marchetto^b and Andrea Stocco^{c,d}

^aUniversity of Genoa, Via Balbi 5, Genova, 16126, Italy

^bUniversity of Trento, Via Sommarive 9, Trento, 38123, Italy

^cTechnical University of Munich, Boltzmannstraße 3, Munich, 85748, Germany

^dfortiss GmbH, Guerickestraße 25, Munich, 80805, Germany

ARTICLE INFO

Keywords:

Test Automation
Artificial Intelligence
AI-assisted Test Automation
Grey Literature
Automated Test Generation
Self-Healing Test Scripts

ABSTRACT

Context: Test Automation (TA) techniques are crucial for quality assurance in software engineering but face limitations such as high test suite maintenance costs and the need for extensive programming skills. Artificial Intelligence (AI) offers new opportunities to address these issues through automation and improved practices.

Objectives: This study surveys grey literature to explore how AI is adopted in TA, focusing on the problems it solves, its solutions, and the available tools. Additionally, the study gathers expert insights to understand AI's current and future role in TA.

Methods: We reviewed over 3,600 grey literature sources over five years, including blogs, white papers, and user manuals, and finally filtered 342 documents to develop taxonomies of TA problems and AI solutions. We also cataloged 100 AI-driven TA tools and interviewed five expert software testers to gain insights into AI's current and future role in TA.

Results: The study found that manual test code development and maintenance are the main challenges in TA. In contrast, automated test generation and self-healing test scripts are the most common AI solutions. We identified 100 AI-based TA tools, with AppliTools, Testim, Functionize, AccelQ, and Mabl being the most adopted in practice.

Conclusion: This paper offers a detailed overview of AI's impact on TA through grey literature analysis and expert interviews. It presents new taxonomies of TA problems and AI solutions, provides a catalog of AI-driven tools, and relates solutions to problems and tools to solutions. Interview insights further revealed the state and future potential of AI in TA. Our findings support practitioners in selecting TA tools and guide future research directions.

1. Introduction


The development of Test Automation (TA) techniques [41] is meant to advance the quality assurance (QA) processes for software engineers [24, 46]. TA supports a wide range of testing tasks, including automated code analysis, unit testing, integration testing, acceptance testing, and performance testing, applicable to various software products such as web and mobile applications. However, the limitations of TA frameworks like, e.g., Selenium WebDriver [52] and Selenium IDE [46] have become evident when creating complex test suites. These tools still demand substantial testing knowledge and programming skills, providing limited assistance in producing high-quality test scripts. Activities like developing robust locators [28] and deterministic test scripts are still predominantly manual processes [24]. Additionally, maintaining automated test scripts becomes laborious and challenging due to constantly changing requirements and software evolution, resulting in issues like flaky or fragile tests that make test scripts costly to maintain [4, 49].

The integration of Artificial Intelligence (AI) and Machine Learning (ML) into TA is getting significant attention from researchers and practitioners, recognizing AI's

potential to bridge the gap between human and machine-assisted testing activities [15]. In this paper, we refer to these techniques as Artificial Intelligence assisted Test Automation (AIaTA). AI holds the promise of transforming TA by simplifying or automating various testing activities, including test planning, authoring, development, and maintenance. Despite the growing adoption of AIaTA by companies [47], there remains a limited understanding of the challenges it addresses, the solutions it offers, and the existing tools and their integration with the software development process.

Several secondary studies have reviewed existing work on AIaTA [18, 21, 30, 39, 56]. This paper is a secondary study that specifically focuses on the grey literature [11] to capture practitioners' perspectives on the adoption of AIaTA. The main goal of our work is to understand the available AIaTA tools, the problems they address, and the innovative solutions they offer. Therefore, we conducted a survey of the grey literature to collect, consolidate, and organize existing AI practices for TA. This paper builds upon the grey literature reviews by Ricca et al. [47, 48] by incorporating more recent sources, thus presenting an extended, multi-year grey literature review. This comprehensive review spans several years, demonstrating the generalizability of the results and examining the underlying relationships among TA problems, AI-based solutions, and existing tools. To gather further insights on the application of AIaTA, we conducted interviews with five researchers and practitioners to collect their experience. These interviews were recorded, transcribed, and analyzed to identify the key

*Corresponding author

 filippo.ricca@unige.it (F. Ricca)

 <https://person.dibris.unige.it/ricca-filippo/> (F. Ricca)

ORCID(s): 0000-0002-3928-5408 (F. Ricca); 0000-0002-6833-896X (A. Marchetto); 0000-0001-8956-3894 (A. Stocco)

arXiv:2408.06224v1 [cs.SE] 12 Aug 2024

problems, solutions, and tools discussed by the interviewees. Thus, the main contribution of this extended paper is a set of taxonomies of problems, solutions, and tools regarding AIaTA, which are validated by experts. To our knowledge, this is the first work that includes interviews with developers on the usage of AI related to E2E testing of web apps.

Our experience shows that grey literature is a valuable yet underutilized resource for AI practices in TA, containing insights that practitioners may not have the time or scientific expertise to rigorously extract. Our goal is to surface these valuable insights, often found in scattered documentation or within the knowledge of professionals, stakeholders, developers, and end-users. We believe our work can help practitioners understand the current state and practices in AIaTA, aiding in the selection of appropriate tools for their testing needs. Additionally, our findings can guide researchers in identifying issues that need further investigation and new research directions.

This paper is organized as follows: Section 2 provides essential background information to help comprehend the rest of the paper. This includes an overview of the current limitations of TA and an introduction to an AI-based mechanism, self-healing test scripts, which addresses the well-known issue of fragile tests. Section 3 reports research questions, adopted procedure, document selection phase, and data analysis of our multi-year grey literature review. The results are detailed in Section 4, and Section 5 explores these findings in relation to the threats to validity and empirical evidence collected. Section 6, on the other hand, briefly presents the design and results of the interviews conducted with five expert software testers. Finally, Section 7 summarizes related works, and Section 8 concludes the paper.

2. Background

In this section, background information is provided to understand the content of the paper. Specifically, a brief explanation is given of what test automation is, along with the known practical benefits and drawbacks as described in both practice and literature. Subsequently, the rationale behind the utilization of AI and ML in this context is explained, along with the associated benefits. Finally, to provide a more concrete understanding, the process of self-healing test scripts is detailed. This process utilizes ML to automatically adjust failing test scripts due to the evolution of the application under test.

2.1. Test Automation

Test automation is the practice of using specialized software tools or frameworks to control the execution of tests and compare actual outcomes with predicted outcomes [10]. It encompasses the entire testing process within an organization, aiming to improve efficiency, accuracy, and coverage in software testing [13]. The primary component driving test automation is the use of test scripts—i.e., programs that run specific portions of the software being tested. These test scripts perform a sequence of predefined actions against the Application Under Test (AUT), consisting of commands and

inputs. The expected results of test scripts are typically described by assertions, which are specific statements provided by a testing framework, e.g., JUnit [33]. Assertions check values, e.g., the result of the call under test, or the final status of some part of the system, against given conditions and raise an exception in case of failure. The testing framework detects these exceptions and marks the tests as failed.

Automated test scripts can target various levels of software [37], addressing different aspects of the system to ensure comprehensive testing coverage. At the most granular level, unit tests focus on individual components or functions within the AUT, verifying that each unit behaves as expected in isolation. This level of testing is crucial for identifying and fixing bugs early in the development process.

Moving up the hierarchy, automated tests can target APIs (Application Programming Interfaces). API testing ensures that the interactions between different software components, as well as with external services, are functioning correctly [19]. This involves sending requests to the API endpoints and validating the responses, including data formats, status codes, and content. API testing is essential for verifying the integrity and reliability of the communication paths within the AUT.

At the highest level, automated test scripts can perform system-wide testing in an end-to-end, user-focused manner. End-to-end (E2E) testing simulates real user scenarios and interactions with the software, covering the entire application flow from start to finish [24]. This approach ensures that all components and subsystems work together seamlessly to deliver the intended user experience. E2E tests are particularly prevalent in web and mobile environments, where user interactions span multiple layers of the application, including the user, back-end services, and databases. This approach is especially important in these kind of environments due to the complexity and variability of these platforms. For example, web applications must be tested across different browsers [36] and devices to ensure consistent performance and user experience. Similarly, mobile applications must be tested on various operating systems, screen sizes, and hardware configurations. Automated end-to-end tests help identify issues that may arise from these variations, ensuring that the application remains working and user-friendly across different environments.

By targeting different levels of the software, from individual units to entire systems, automated test scripts provide a comprehensive and scalable testing solution. This multi-level approach [7] helps ensure that all aspects of the software are thoroughly tested, contributing to the overall quality and reliability of the final product.

Test automation offers numerous benefits [43], including increased testing efficiency, higher test coverage, and improved accuracy by reducing human error. It enables repetitive and regression testing [61], where tests are run frequently to ensure that new changes do not negatively impact existing functionality. This is crucial for maintaining software quality over time.

However, test automation also presents well-known challenges, in particular in the context of web and mobile applications [38, 25]. Traditional automation testing faces issues such as slow test execution and the persistent problem of maintaining test scripts. Slow test execution is a primary reason for delays in testing, often caused by a focus on GUI automation, poorly designed test scripts, and insufficient test case sequencing.

Excessive test maintenance is another major issue, as test scripts are highly sensitive to the application's UI and structure. Any minor change in the UI necessitates corresponding changes in the test script, leading to a significant portion of automation effort being dedicated to test script maintenance.

Additionally, the test script can break due to small changes in the code (test script fragility problem), such as renaming or relocating a GUI component on the screen [55]. Managing and maintaining test data adds another layer of complexity, requiring testers to create test data generation scripts and use version control effectively. Finally, traditional automation testing is complex and code-intensive, and a lack of skilled resources often leads to the failure of test automation projects due to inadequate planning.

2.2. AI-assisted Test Automation

Artificial Intelligence involves enabling computer programs to execute tasks that would typically necessitate human intelligence. Within this broad definition, we find machine learning (ML), which involves pattern recognition and learning from data to solve classification or regression problems [3]. Additionally, Computer Vision (CV) provides techniques for analyzing and understanding images, much like how humans perceive them, with popular applications including pattern recognition, image analysis, and optical character recognition. Finally, Natural Language Processing (NLP) enables computers to analyze and understand human language. In the last ten years, the availability of large benchmarks of labeled data and unprecedented computing power has enabled the application of Deep Learning techniques such as deep neural networks (e.g., convolutional neural networks and recurrent neural networks) to complex vision and spatiotemporal problems. More recently, transformer architectures have enabled the exploitation of language embedding that is at the basis of large language models (LLMs), i.e., novel types of AI that achieved unprecedented performance in NLP and coding tasks.

Traditionally, AI methods and models have been widely applied to various phases of the software development lifecycle, including software testing. The application of AI to support software testing is a well-established and increasingly popular research topic, as evidenced by several recent studies in the literature [1, 8, 16, 20].

In the context of Test Automation, AI is also employed for various purposes [39, 56]. For example, AI and ML algorithms are used to analyze application behavior and user interactions to automatically generate test scripts. This reduces the manual effort required for test script creation and improves test coverage. Another example is self-healing test

scripts, in which test constructs are automatically maintained when the test code becomes obsolete or loses sync with the AUT during software evolution. This is meant to diminish the maintenance overhead associated with test automation. Additionally, AI techniques can generate additional test data by analyzing patterns observed in production data. This facilitates the creation of diverse test scenarios, for more comprehensive testing of the AUT. Lastly, ML algorithms can detect anomalies in test results, including unexpected behavior or performance issues. This allows for early detection of defects, mitigating their impact on the production environment. Additionally, AI can enhance test execution by intelligently scheduling tests, considering factors such as code changes, risk profiles, and resource availability.

3. Empirical Study

Our research centers on the grey literature that discusses the application of AIaTA. We consider the following research questions:

RQ₁ (Issues/problems). *How does AI contribute to mitigating challenges in TA?*

RQ₂ (Solutions/approaches). *In what ways does AI provide solutions to enhance TA?*

RQ₃ (Tools and Platforms). *Which AI tools/platforms are widely used in the context of software testing?*

RQ₄ (Generalizability). *How generalizable are the taxonomies related to issues, solutions, and tools constructed to address the previous RQs?*

RQ₅ (Problems vs. Solutions). *What is the relationship between TA problems and solutions in AIaTA?*

RQ₆ (Tools vs. Solutions). *How are AIaTA tools and solutions interconnected?*

RQ₁ identifies the main TA problems and issues that are supported by AI-based solutions, i.e., AI-enhanced testing techniques and tools. To answer RQ₁, we manually built a taxonomy of TA issues and problems addressed by AI-based solutions, considering the sources of grey literature.

RQ₂ analyzes the solutions proposed for TA problems and issues that are based on AI algorithms and tools. To answer RQ₂, we built a taxonomy of AI-based solutions used to address TA issues and problems identified in RQ₁. In this case, as well, the information was inferred using grey literature sources.

RQ₃ identifies the existing tools and platforms that assist in the testing phase with AI-based solutions presented in the literature. To answer RQ₃, we extracted from grey literature existing tools that implement the AI-based solutions identified in RQ₂.

RQ₄ assesses the degree of generalizability of the built taxonomies by validating them on a set of studies that were not used during its development.

RQ₅ maps TA problems and issues with proposed AI-based solutions. To answer RQ₅, we mapped the problems and issues identified in RQ₁ with their proposed AI-based solution identified in RQ₂.

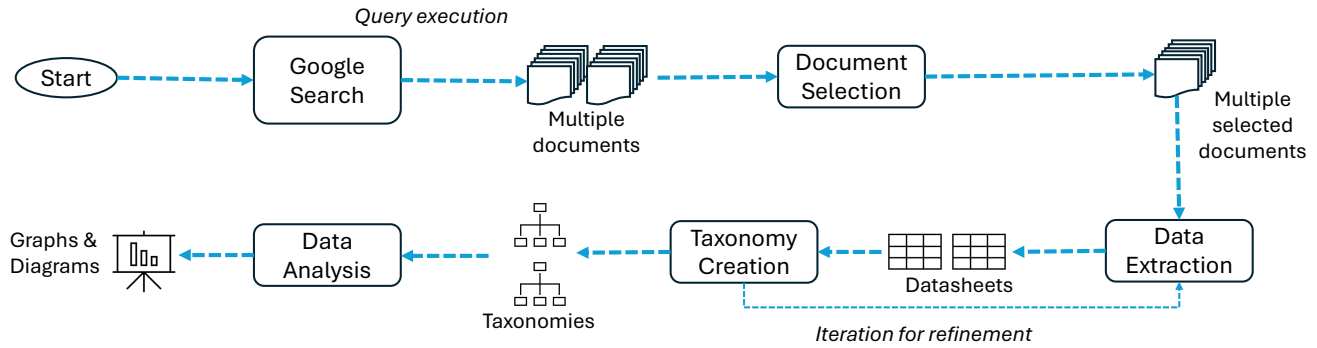


Figure 1: Overview of the procedure adopted in each iteration of the grey literature.

Finally, the last research question RQ_6 maps such proposed AI-based solutions towards existing tools that implement them. To answer RQ_6 , we mapped the proposed AI-based solution identified in RQ_2 with the implemented tools supporting them, as listed in RQ_3 .

3.1. Procedure

To review the grey literature relevant to our research questions, we iterated the five-step procedure defined in our initial publication [47] three times, with an approximately one-year interval between each iteration, and further refined it in our extended study [48]. Figure 1 shows these five steps:

1. Google search: by using a string query, we searched for potentially interesting documents.
2. Document selection: by applying inclusion/exclusion criteria, we checked the initial set of potentially interesting documents, thus identifying a reduced number of documents of interest, to be further analyzed.
3. Data extraction: we read and analyzed each document of interest to extract information concerning TA problems, AI-based solutions, and tools.
4. Taxonomies creation: we created taxonomies of problems, solutions, and available tools.
5. Data analysis: we further analyzed the collected information using Sankey diagrams [50] and manual in-depth analysis for discovering relationships.

In the rest of the section, we present each step in detail.

3.1.1. Google Search

The Google search was intentionally broad to gather a large pool of documents. This approach was intended to maximize the retrieval of all relevant documents, at the cost of including documents that were not directly relevant to our study. Thus, we established specific inclusion and exclusion criteria to filter out the irrelevant documents and ensure that the remaining ones align with the study's scope. We used Google in incognito mode to conduct our searches, to ensure that our search results were not influenced by previous search

histories or personalized algorithms. For our Google search, we used the following query string:

```

(("artificial intelligence" OR "AI" OR "machine
learning" OR "ML")
AND ("test automation" OR "automated testing"))
  
```

The first part of the query string is characterized by words related to artificial intelligence and machine learning, whereas the second part is related to automated testing. All relevant documents contained an instance of each keyword from each part of the string (AND operator), whereas keywords within the same part were ORed. For each query, the first 15 pages of results were scraped, each having 10 documents. We conducted eight queries, which accounted for 1,200 documents that were analyzed overall (150 documents for each query). The output of this step is a list of candidate web documents potentially regarding TA conducted with AI-based solutions. Table 1 (column "# Date") reports the date on which the search was conducted.

3.1.2. Document Selection

The list of candidate web documents has been analyzed according to a set of inclusion and exclusion criteria, for filtering out irrelevant documents. We mainly considered three inclusion criteria: (i) the document needs to investigate AI or ML tools or methods that can support TA; (ii) the document should apply to either capture-replay, programmable (or script-based), visual, or combinations of these testing approaches; (iii) tools' websites and presentations are included as long as they specify useful information, and (iv) presentations and slide decks are included only if in scope. We mainly excluded documents (exclusion criteria) if: (i) they are scientific peer-reviewed papers; (ii) they are not written in the English language; (iii) they provide guidelines for using AI within manual testing; (iv) they are videos or books; (v) they are part of the website that requires registration; and (vi) they contain only generic information on AI or software testing, without relating the two concepts. These criteria have been applied by analyzing each document obtained in the initial search on Google, thus only those documents that provide direct evidence about the study's objective were retained. The output of this step is a list of relevant candidate

	A	B	C	D	E	F	G	H	I	J
1	Id	Link	Author	Type	Date	Tool	Algorithm	Testing level	PROBLEMS	SOLUTIONS
2	179	https://www.testdevlab.com/blog/2022/01/11/top-7-qa-and-software-testing-trends-in-2022/	Martina Stojmanovska	blog	11/1/2022				development-manual-code-development	TESTCREATION-automated-test-generation
3									development-manual-code-development	TESTCREATION-automated-test-generation-from-user-behaviour
4									maintenance-overhead	TESTREPAIR-smart-locators
5	180	https://testsigma.com/blog/top-software-testing-trends-to-look-out-for-in-2022/	Harish Rajora	web article	7/1/2022	Testsigma	AI	E2E/GUI	development-manual-code-development	TESTCREATION-automated-test-generation
6									development-manual-data-creation	TESTCREATION-automated-data-generation
7									maintenance-overhead	TESTREPAIR-self-healing-test-scripts

Figure 2: A screenshot of the publicly available Google Docs spreadsheet featuring the data extracted from the documents.

Table 1
Summary of data related to the taxonomies.

Iteration	Date	# Analyzed	# Problems	# Solutions	# Tools
First [47]	Sept. 2020	156	35	35	50
Second [48]	Febr. 2023	95 (251)	5 (40)	9 (44)	17 (67)
Third	April 2024	91 (342)	7 (47)	15 (59)	33 (100)

documents regarding TA conducted with AI-based solutions. Table 1 (column “# Analyzed”) reports the number of documents selected and then analyzed in this step for each iteration. In parentheses, we have reported the cumulative total value across the various iterations.

3.1.3. Data Extraction

In this step, each relevant candidate document has been read and analyzed in detail and the following information has been collected: (1) web link to the document, (2) name and surname, if any, about the author(s) of the document, (3) the publication date of the document (if available), (4) the type of the document (e.g., blog post, interview transcript), (5) the test automation tool(s) investigated or described in the document, (6) the testing level discussed (e.g., unit, integration, system, acceptance), (7) the test automation problems and issues addressed, and (8) the solution offered. For each iteration, the authors conducted a pilot study by labeling a randomly selected sample of 10 documents. The consensus on the labels was high in all the cases, allowing the authors to proceed with the analysis independently on separate sets of documents for the subsequent phases. In detail, we build a tabular representation of the data extracted from the documents implemented as an online spreadsheet on Google Docs. Figure 2 shows an image of the online spreadsheet on Google Docs we used to gather data, which details the contribution aspects. Each row of the table reports the information collected for a document and an individual problem or solution. Hence, more rows can be used to detail several TA problem-solution tuples found in a single document. During the mapping process, the authors reused existing labels whenever applicable to avoid introducing nearly identical labels for the same TA problem/solution and to maintain consistent naming conventions. We recall

that the set of TA problems and TA solutions considered has been defined iteratively by starting from a small set of documents (as documented in [47]). Each newly identified problem and/or solution was incrementally considered, and the document was re-analyzed if needed.

3.1.4. Taxonomy Creation

By collecting the identified tuples of test automation problems and solutions, as well as the list of existing tools, two taxonomies have been constructed to answer RQ₁ and RQ₂, following a systematic process [14], while the list of tools has been used to answer RQ₃. To build the taxonomies, we clustered related TA problems and/or TA solutions, thus identifying categories of problems and solutions. Then, parent categories have been created, by following a specialization relationship between categories and subcategories. Especially, at the beginning of the process, some iterations between this step and the previous one, related to Data extraction, were needed to clearly identify the relevant information. The remaining columns of Table 1 report, for each iteration, the number of identified categories of problems (column “# Problems”) and solutions (“# Solutions”) in the two taxonomies and the number of identified tools (“# Tools”). In parentheses, we have reported the cumulative total value across the various iterations.

3.1.5. Data Analysis

We answered the first three research questions (RQ₁, RQ₂ and RQ₃) by analyzing the two taxonomies of problems and solutions and the list of tools. In order to answer RQ₄, about the generalizability of the built taxonomies, we analyzed the set of categories, sub-categories, and values added in each of the three iterations. Each row in Table 1 reports the data concerning a specific iteration of the experiment. Further analysis has been conducted after the construction of the taxonomies by considering the information related to the tuples of TA problems, solutions, and tools. In particular, several Sankey diagrams [50] have been constructed aiming at visualizing the possible interconnections between AI-based solutions and TA problems (to answer RQ₅), and AI-based tools and AI-based solutions (to answer RQ₆). In a Sankey diagram, the relations between nodes are shown

Table 2

Taxonomy of test automation problems identified in the first [47], second [48] (in green), and third iteration (in light blue).

PROBLEM	[47]	[48]	#	PROBLEM	[47]	[48]	#
Test Planning	22	32	52	Test Execution	71	103	118
Critical paths identification	13	13	19	Untested code	29	34	40
Planning what to test	7	9	11	Flakiness	18	22	22
Planning long release cycles	2	2	2	Slow execution time	14	16	23
Test process management	-	8	20	Useless test re-execution	4	7	9
Test Design	8	22	55	Scalability	2	3	13
Programming skills required	5	11	25	Parallelization	2	3	5
Domain knowledge required	3	9	12	Low user responsiveness	1	1	1
Designing effective Testcases	-	1	17	Platform independence	1	1	5
Adherence to coding standards	-	1	1	Test Closure	47	59	96
Test Authoring	110	133	220	Manual debugging overhead	18	22	26
Manual code development	52	58	108	Costly result inspection	10	11	23
Manual API test development	7	11	13	Visual analysis	19	25	39
Manual data creation	19	24	37	Data Quality	-	1	1
Test object identification	13	13	19	Code Quality	-	-	7
Cross-platform testing	10	15	26	Test Maintenance	82	102	184
Mimic geo-location testing	1	1	2	Manual test code migration	3	3	4
Costly exploratory testing	5	5	6	Bug prediction	11	13	17
Locators for highly dynamic elements	1	1	1	Fragile test script	10	12	27
Test code modularity	1	1	1	Regression faults	2	7	7
Accessibility testing	1	1	1	Costly visual GUI regression	8	10	19
Adequacy-focus on faulty-areas	-	3	5	Maintenance overhead	48	57	100
Optimize test strategies	-	-	2	Change Requirements	-	-	1
Test Type	-	-	3	Communication developers-testers	-	-	5
Conducting thorough security testing	-	-	2	Troubleshooting and root cause analysis	-	-	4
Testing-AI-generated-code	-	-	1	Generic	23	33	55
Unspecified	60	77	133	Total	423	545	917

by links that connect input and output nodes (in our case, respectively, solutions–problems and tools–solutions), while the width of a link indicates the relevance or magnitude of the relationship. By using the Sankey diagrams, we identified trends and patterns in the relations among TA solutions, problems, and tools, thus being able to answer RQ₅ and RQ₆. More specifically, we employed pandas data-frames [34] to filter information related to the problems addressed and solutions provided (RQ₅), as well as the tools used (RQ₆). We excluded entries where the problem, solution, or tool was either unspecified or too generic. For the relevant entries, we counted each pairwise combination of <problem, solution> and <tool, solution>, treating each instance of a problem-solution pair or tool-solution pair as a unique connection. We utilized the plotly library [17] to generate the Sankey diagrams [50], though it is important to note that the diagrams presented in this paper focus only on the most prominent connections for the sake of space and readability, while the complete set of diagrams encompasses all collected sources.

3.2. Iterations

As previously mentioned, we conducted three iterations of the described procedure. The first search was conducted in September 2020 while the second search was conducted in February 2023. These iterations have been documented in our previous published studies [47, 48]. The third iteration search was conducted in April 2024 and it is presented in this paper. In each iteration, we started from the previously built taxonomies and refined them by adding new categories and values if needed.

4. Results

4.1. RQ₁ (Issues/problems)

Table 2 reports the existing TA problems and issues and the number of individual occurrences. The table reports the data collected in the first [47] and in the second [48] (in green) iteration, as well as the updated version related to the third iteration (in light blue).

Overall, in the three iterations, we identified 917 individual occurrences into the seven main categories: (1) test planning, 5.6% of occurrences; (2) test design, 5.9% of occurrences; (3) test authoring, 24.1% of occurrences; (4) test type, 0.3% of occurrences; (5) test execution, 12.8% of occurrences; (6) test closure, 10.4% of occurrences; and (7) test maintenance, 20% of occurrences. Other two categories such as Unspecified and Generic collected respectively 14.5% and 5.9% of occurrences.

The most represented subcategory is *Manual code development* (11.6%), which was not surprising since it is well known [23, 26] that the development of test cases and scripts is a complex task that requires non-trivial domain knowledge and appropriate testing and programming skills.

The second most mentioned subcategory is related to *Maintenance overhead* (10.9%). Nowadays, software applications evolve continuously, in particular, in fields such as web and mobile. This continuous evolution of software applications requires continuous maintenance and evolution also of corresponding test suites, thus being aligned with the applications. Existing research [23, 26] shows that test maintenance is a highly expensive and time-consuming task,

Table 3

Taxonomy of test automation solutions identified in the first [47], second [48] (in green), and third iteration (in light blue).

SOLUTION	[47]	[48]	#	SOLUTION	[47]	[48]	#
Test Generation	125	192	302	Debugging	62	82	149
Aut. test generation	29	48	74	Intelligent test analytics	17	22	27
Aut. generation using machine translation	11	13	25	Automated coverage report	14	22	28
Aut. generation from user behaviour	11	22	29	Noticeable code changes identification	12	13	23
Aut. test generation from API calls	6	6	13	Runtime monitoring	10	11	12
Aut. test generation from mockups	3	3	3	Flaky test identification	7	8	9
Aut. test generation using crawling	2	11	16	Bad smell identification	1	1	1
Aut. test generation using GenAI	-	-	18	Intelligent log analysis	-	-	5
Codeless test generation	-	-	11	Intelligent test reporting	-	-	6
Declarative testing	-	2	3	Decoupling test framework from host	1	1	7
Predict faulty-areas	-	4	4	Root-cause-analysis	1	10	10
Aut. data generation	22	22	32	Prediction of failures	-	3	21
Robust element localization	13	13	14	Maintenance	81	141	201
Dynamic user-behaviour properties recognition	8	8	8	Self-healing mechanisms	43	43	63
Automated exploratory testing	7	10	12	Self-healing test scripts	24	32	55
Object recognition engine	6	13	19	Smart locators	19	21	24
Mock generation	3	3	3	Intelligent fault prediction	12	13	13
Self-learning	2	3	7	Intelligent selective test re-execution	12	12	12
Automated API generation	1	9	9	Intelligent waiting sync	5	5	5
Page object recognition	1	2	2	Intelligent test prioritization	4	6	11
Test Optimization	-	-	12	Aut. identification environment configurations	3	6	6
Improve test quality	-	-	8	Pattern recognition	1	1	3
Static (AI) Code Analysis	-	-	2	Remove unnecessary test cases	1	1	6
Improve test scalability	-	-	1	Reduce UI testing	-	1	3
Anonymous test data	-	-	1	Test Process	-	-	33
Test Execution	-	8	40	AI data-driven test decisions	-	-	13
Cloud execution	-	2	11	AI (Chat-bots) for communication	-	-	4
Decoupling test framework from host	-	2	8	Shift Left Testing	-	-	2
Smart test execution	-	3	19	Hyper Automation Testing	-	-	1
Anomaly detection	-	1	1	Test type	-	-	4
Headless execution	-	-	1	IOT testing	-	-	2
Oracle	38	46	70	Blockchain testing	-	-	2
Visual testing	38	46	70	Unspecified	91	99	119
				Generic	25	30	55
Total					466	607	972

and in some cases, it can even be the most costly test automation activity [43].

Other representative subcategories, even if less numerous, are: *Untested code* (4.3%), *Visual analysis* (4.2%), and *Manual data creation* (4%).

Untested code and *Manual data creation* are key aspects to optimize the generation of effective test cases. On the one side, in fact, it is impossible to test everything in a software application, so strategies and techniques to identify the less tested portion of the application are fundamental for reducing the overall effort by focusing on where it is needed. For instance, it has been demonstrated that test suites with low coverage of the app code have a lower chance of detecting bugs [5]. On the other side, the use of high-quality test data is a critical part of testing [49], but producing such high-quality test data can be time-consuming.

Validating the visual correctness of a GUI (*Visual analysis* subcategory) is a particularly challenging task. When done manually, testers must visually inspect all elements of the application to ensure they appear as intended, often across multiple devices and platforms. This process generally involves comparing screenshots of the current application against a previously established baseline, or “golden master”, and reporting any significant visual discrepancies.

Another significant challenge in test automation is test flakiness (*Flakiness subcategory*). A test script is considered flaky if its execution on the same application results in inconsistent outcomes due to environmental factors like screen size, browser version, or network conditions [22, 31]. This issue undermines the reliability of test automation, as flaky tests are more prone to missing defects (false negatives) or reporting incorrect errors (false positives).

4.2. RQ₂ (Solutions/approaches)

Table 3 reports the existing AI-based solutions to the evidenced TA problems and issues (RQ₁). The table reports the data collected in the first [47] and in the second [48] (in green) iteration, as well as the updated version related to the third iteration (in light blue).

The solutions have been grouped into eight main categories. In the table, TA solutions and their occurrences are listed for iterations. Overall, in the three iterations, we identified 972 individual occurrences into the eight main categories: (1) test generation, 31% of occurrences; (2) test oracles, 7.2% of occurrences; (3) debugging, 15.3% of occurrences; (4) test maintenance, 20.6% of occurrences; (5) test process, 2% of occurrences; (6) test execution, 4.1% of occurrences; (7) test optimization, 1.2% of occurrences; and

Table 4

The most popular AI-based tools used in the context of software testing, as identified in the first [47], second [48] (in green), and third iteration (in light blue).

[47]			[48]		Third Iteration	
	Tool	#	Tool	#	Tool	#
1	Testim	14	Appltools	24	Appltools	50
2	Appltools	12	Testim	20	Testim	38
3	Functionize	11	Functionize	16	Functionize	35
4	Mabl	7	Mabl	14	AccelQ	32
5	LambdaTest	6	TestCraft	9	Mabl	29
6	Launchable	5	Parasoft SOA test's Smart API Test Generator	8	TestCraft	21
7	Parasoft SOA test's Smart API Test Generator	5	SauceLabs	8	Testsigma	18
8	QMetry Digital Quality Platform	5	TestComplete	8	Katalon	15
9	Testsigma	5	UiPath Test Suite	8	ChatGPT	14
10	UiPath Test Suite	5	AccelQ	7	TestComplete	12
11	Test.AI	4	ChatGPT	7	Parasoft SOA test's Smart API Test Generator	10
12	Tricentis Tosca	4	LambdaTest	7	UiPath Test Suite	10
13	AccelQ	3	Testsigma	7	LambdaTest	9
14	Appium	3	Test.AI	6	SauceLabs	9
15	Google OSS-Fuzz	3	Eggplant AI	5	Aqua	8
16	Kobiton	3	Katalon	5	Test.AI	7
17	Percy	3	Launchable	5	Testrigor	7
18	SauceLabs	3	Parasoft Selenic	5	Appium	6
19	TestCraft	3	QMetry Digital Quality Platform	5	Eggplant	6
20	TestProject	3	Tricentis Tosca	5	Parasoft Selenic	6
21	Appvance IQ	2	Appium	4	pCloudy	6
22	Browsershots	2	BrowserStack	4	Tricentis Tosca	6
		50			67	100

(8) test type, 0.4% of occurrences. Other two categories such as Unspecified and Generic collected respectively 12.2% and 5.6% of occurrences.

The most represented subcategory is *Automatic test generation* (189 occurrences out of 972, 19.4%, by considering all automatic test generation subcategories). Automatic test case generation, however, remains an ambitious task, even when AI-based technologies are used. We could observe that 7.6% of the occurrences related to automatic test generation did not give any indication about how automated test code generation is implemented. Existing works generate tests automatically by: (i) starting from the analysis of the real users' behaviors (2.9%); (ii) by applying machine translation techniques (2.5%), for example, natural language processing techniques that develop test scripts starting from test requirements descriptions written in natural language; and (iii) recently, by adopting generative AI strategies (1.8%).

The second most mentioned subcategory is related to *Visual testing* (7.2%). To implement visual testing strategies different computer vision solutions are applied to automatically identify functional and visual problems in the application GUI, in particular, by applying image-recognition and OCR techniques to identify graphical elements and detect changes among the different tested versions.

Another representative subcategory, even if less numerous, is related to test maintenance, i.e., *Self-healing mechanisms* (6.4%). Self-healing refers to the capability of automatically applying corrective actions when a test script is broken, for instance, after an application maintenance or evolution task, without human intervention. In fact, the

continuous evolution of modern applications breaks test scripts, thus requiring a large effort to repair such test scripts. Following the analysis of the documents, we further split this subcategory into two distinct categories: *Self-healing test script* (5.6%) and *Smart Locators* (2.4%). The adoption of smart locators can be relevant to prevent the need for repairing interventions. By using multiple constructs that can be updated dynamically as the application evolves, in fact, smart locators tend to be resilient to test breakages. In detail, by using multiple attributes per web element to locate, smart locators improve the robustness of test scripts.

4.3. RQ₃ (Tools and Platforms)

Table 4 shows that we identified in total 100 tools that support the TA solutions strategies (RQ₂) and that were discussed in the analyzed documents in the three iterations. Among these tools, the table lists the twenty-two most frequently cited and discussed ones. Considering the third iteration, the top-5 tools are: *Appltools*,¹ *Testim*,² *Functionize*,³ *AccelQ*,⁴ and *Mabl*.⁵

Appltools focuses on GUI testing by applying automated visual testing strategies based on different computer vision technologies and algorithms. Testim applies intelligent capture-replay approaches and GPT-based technology for automatic test generation and adopts smart locators to prevent test breaking. Testim also supports AI data-driven

¹<https://appltools.com>

²<https://www.testim.io>

³<https://www.functionize.com>

⁴<https://www.accelq.com>

⁵<https://www.mabl.com>

testing decision strategies. Functionize uses advanced NLP technologies for automatic test generation and adopts AI-based strategies for applying self-healing maintenance, in particular, for dynamically updating test scripts based on the application changes. Mabl uses a crawler for exploring a web application aiming at automatically generating test scripts by covering all reachable parts of the application under test. Mabl offers also a self-healing test script solution and supports AI data-driven testing decision strategies. Finally, AccelQ uses generative AI to automatically generate tests and offers self-healing test scripts, as well as an efficient cloud-based test execution.

4.4. RQ₄ (Generalizability)

Table 2, Table 3, and Table 4 report TA problems, solutions, and existing tools/platforms that we have identified in the three iterations of the conducted grey literature analysis: first [47], second [48] (in green), and third iteration (in light blue) documented for the first time in this work. In the first iteration, we analyzed 156 documents (see Table 1), in the second one we additionally considered 95 documents (+60.8% to the initial set of 156 documents of [47]), and in this third iteration, we additionally considered 91 documents (+36.2% concerning the total number of documents, that is, 251 found in the first two iterations).

The three different iterations allow us to: (i) built a taxonomy of TA problems composed of 47 subcategories (40 after the second iteration, and 35 after the first one), grouped into 7 main categories (6 after the first and the second iterations), and in which 917 individual occurrences have been distributed (545 after the second iteration, and 423 after the first one); (ii) built a taxonomy of TA solutions composed of 59 subcategories (44 after the second iteration, and 35 after the first one), grouped into 8 main categories (5 after the second iteration, and 4 after the first one), and in which 972 individual occurrences have been distributed (607 after the second iteration, and 466 after the first one); and (iii) identified a list of 100 tools and platforms (67 after the second iteration, and 50 after the first one).

With respect to the two initial taxonomies, in detail, we have only partially extended the taxonomy related to TA problems, leaving it almost stable with respect to the one defined initially in [47]. In fact, during the second iteration, we only introduced 5 new subcategories of TA problems, resulting in a total of 44 individual occurrences out of 545. In the third iteration, we added 7 additional subcategories, which accounted for 25 individual occurrences out of 917. We also made only partial progress in extending the taxonomy related to AI-based solutions. Specifically, during the second iteration, we introduced one new category (i.e., Test Execution) and 9 subcategories, which accounted for 80 individual occurrences out of 607. In the third iteration, we added 3 additional categories (i.e., Test Optimization, Test Process, and Test Type) along with 15 subcategories, resulting in 77 individual occurrences out of 972.

Regarding tools and platforms, however, the situation is completely different. In a short time, their number has grown

significantly, and new options have appeared on the market. Among the new tools and platforms, we find ChatGPT, Aqua, TestRigor, and pCloudy. ChatGPT, an advanced language model from OpenAI that generates human-like text, is primarily used for creating test scripts in software testing and was the most frequently mentioned tool in the documents we reviewed, with 14 total occurrences. Following that, we have Aqua, TestRigor, and pCloudy. Aqua is a test management platform that leverages AI to optimize test planning, execution, and tracking. Offering cloud-based solutions for both manual and automated testing, it integrates with various tools to improve testing efficiency and effectiveness. TestRigor is an automated testing tool designed for creating and running end-to-end tests using plain English commands. It simplifies test creation and maintenance. pCloudy is a unified app testing platform that ensures app quality across various devices and browsers. It offers cloud-based manual and automated testing with access to thousands of real devices. Leveraging AI, pCloudy enhances integration, efficiency, and effectiveness in testing.

In conclusion, regarding the generalizability of the taxonomies, we can state that in our analysis, we have only partially extended the initial taxonomies. The list of problems and solutions has remained largely consistent with the previous versions, with only a few minor exceptions. On the other hand, the list of tools has shown significant and consistent growth across the iterations, doubling their number from the first to the third iteration.

4.5. RQ₅ (Problems vs. Solutions)

Figure 3 utilizes a Sankey diagram to illustrate the relationships between problems and AI-based solutions in the test planning phase: problems are shown on the left, while solutions are shown on the right. In the planning phase, the most relevant problem (the larger node on the left) identified by the community is the identification of test paths, i.e., a specific sequence of actions that are executed to verify that a particular feature or functionality of the application under test is working as expected. This sequence can involve clicking on links, filling out forms, submitting data, and interacting with various elements on the web pages. In particular, testers are interested in identifying the critical paths in the app to test them thoroughly. In terms of solutions adopted, automatic test generation based on crawling and user behaviors are the most frequently discussed. However, as shown in the diagram, other solutions for identifying critical paths are: predict faulty areas in the application under test and intelligent test analytics. It is worth noting that test process management has become an increasingly relevant issue over the years. In fact, there has been a noticeable rise in individual discussions on this topic within the community. As shown in Table 2, there were no occurrences of this issue identified in the first iteration, eight occurrences in the second iteration, and twenty occurrences in the most recent iteration. The most commonly used solution for this problem is using AI and data analytics to guide the software testing lifecycle. This approach leverages various technologies and

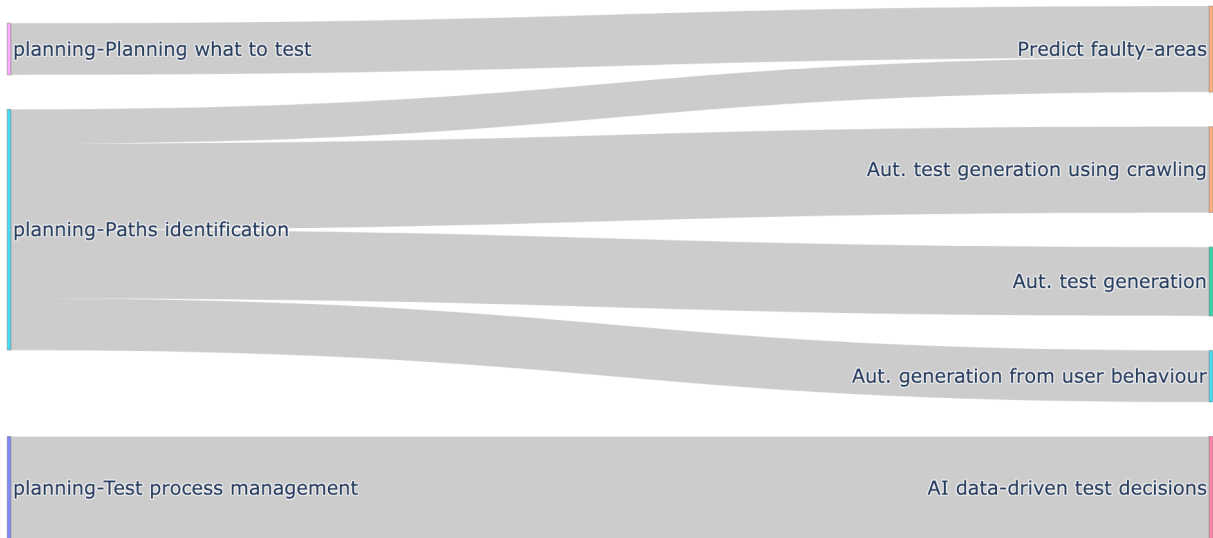


Figure 3: Problems vs Solutions: Test planning Sankey diagram.

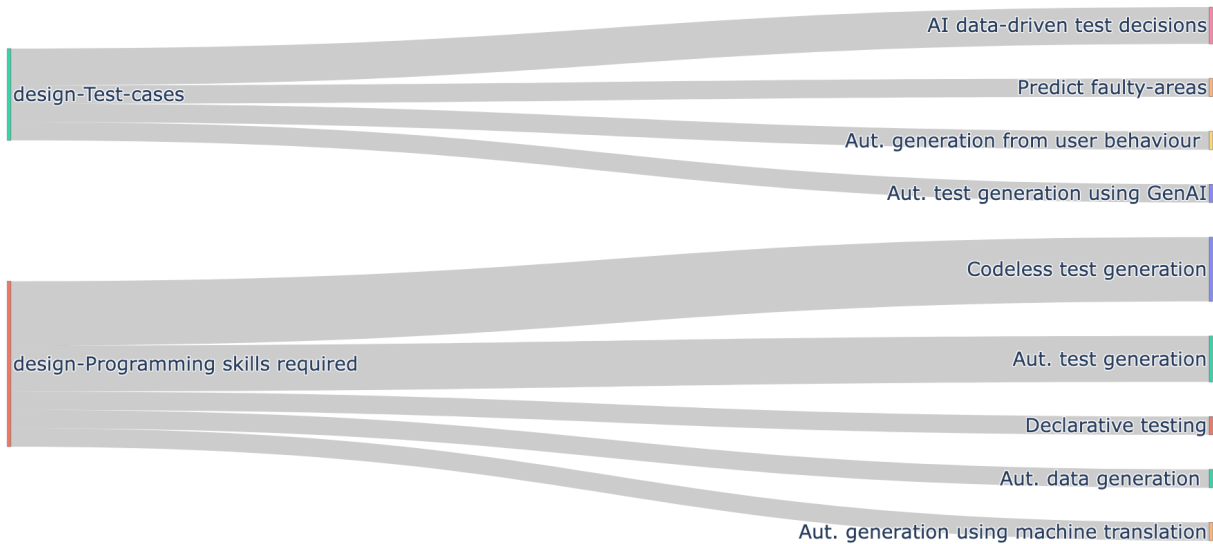


Figure 4: Problems vs Solutions: Test design Sankey diagram.

methods to make informed decisions based on data rather than relying solely on manual processes or intuition.

Similarly, Figure 4 shows that the most relevant test problem when designing tests, concerns the programming skills required to develop test scripts (the larger node on the left), thus as expected, several different strategies and technologies are proposed (we can see in the diagram different output nodes for programming skills) for automatically

generating test scripts and test data, e.g., the adoption of generative AI, NLP, codeless test scripts (e.g., by visual testing mechanisms). The second most important problem we can note is the design of test cases, which involves determining what to test, the steps to take to create a test case, and what the oracle is. We can see from the diagram that various solutions are proposed for this problem, ranging from using automated exploratory testing to automatic generation, for example by using generative AI.

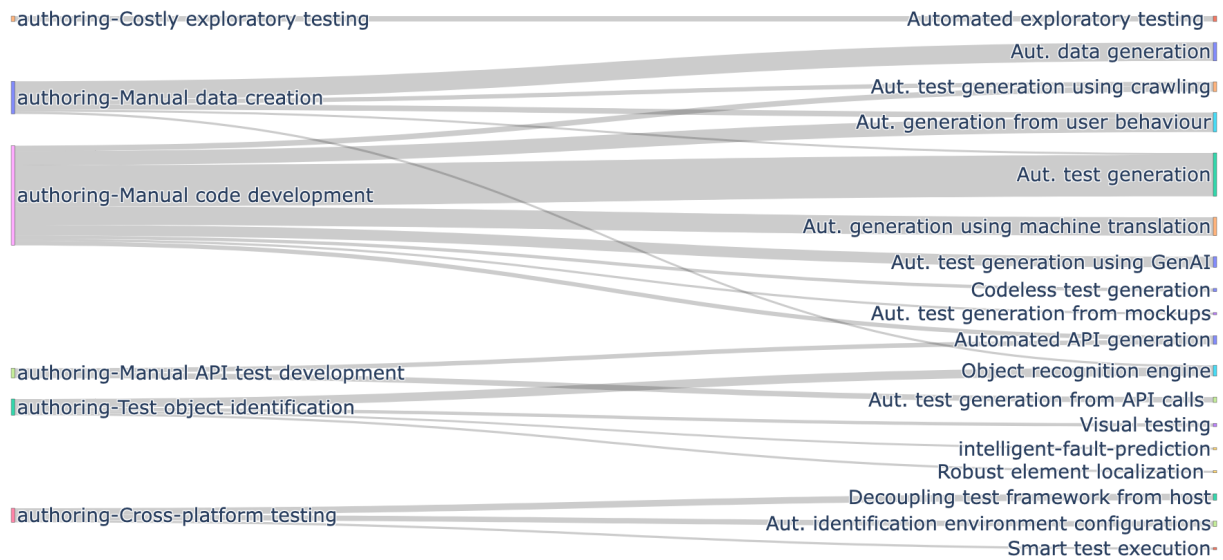


Figure 5: Problems vs Solutions: Test authoring Sankey diagram.

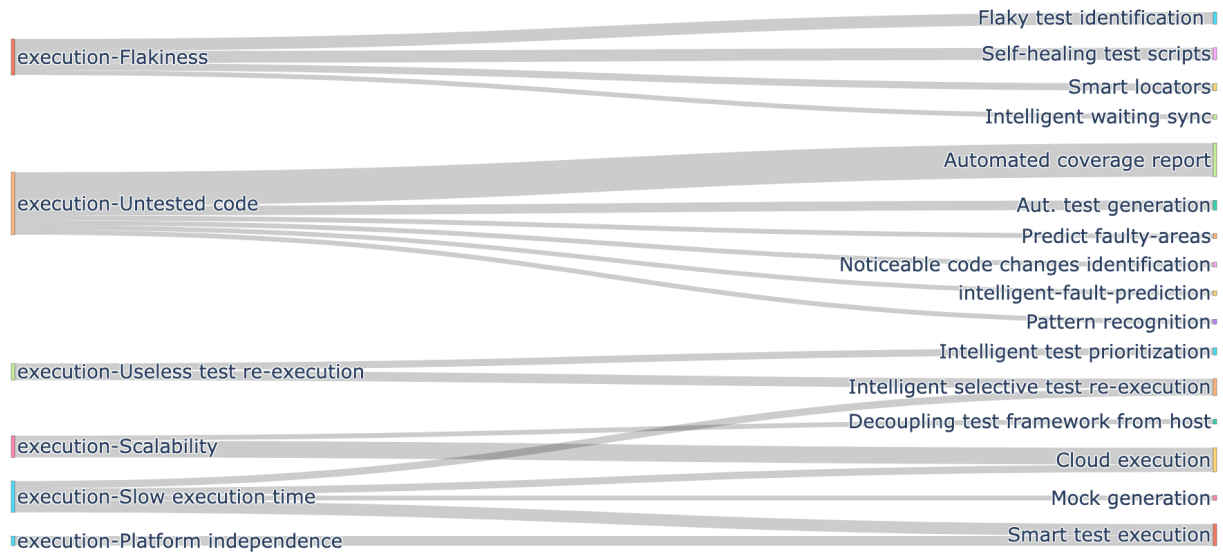


Figure 6: Problems vs Solutions: Test execution Sankey diagram.

Figure 5 represents the Sankey diagram problems/solutions in the authoring phase and shows that the most relevant problems in this phase are related to the manual effort needed to develop/implement test cases in test scripts and creating effective test data (see the two larger nodes on the left). Among the solutions to limit the manual effort in implementing test cases, we find that the predominant category, as we would expect, is automatic generation. The subcategories include all the automatic generation methods

found, such as using screen mockups as a starting point, employing a web crawler, and even utilizing generative AI tools/platforms. Regarding the problem of generating effective test data, the main solution is to rely on AI-based tools capable of generating it. It is interesting to note that test object identification—the ability of testing tools/platforms to correctly recognize and interact with various elements (objects) on a web page, e.g. dynamic or modal elements, and cross-platform problems—cross-platform testing involves

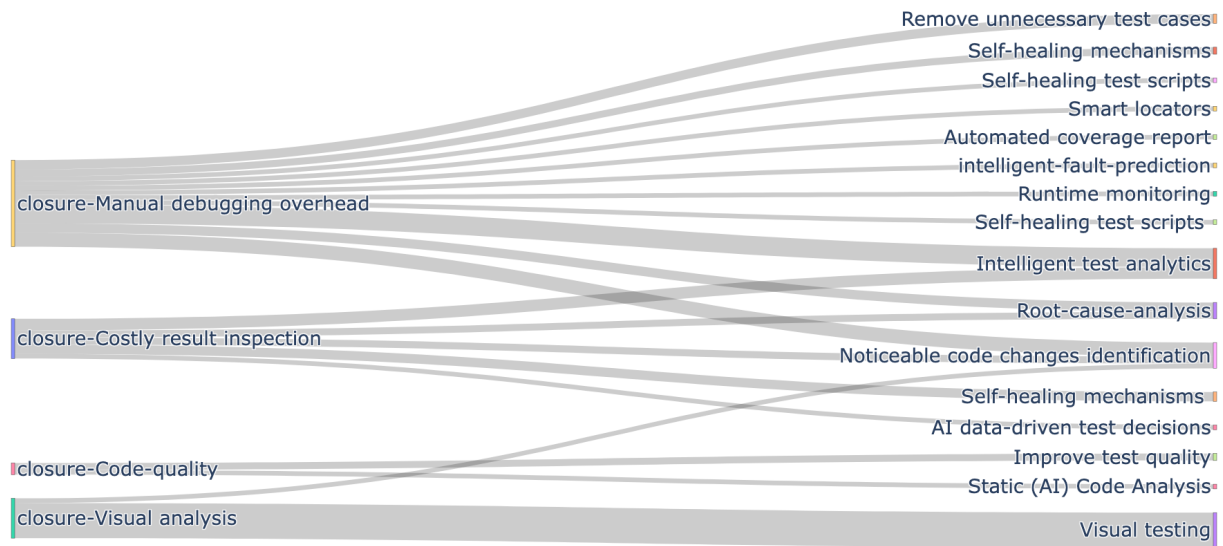


Figure 7: Problems vs Solutions: Test closure Sankey diagram.

verifying that a software application functions correctly across different environments, including various operating systems, browsers, and devices. Planning cross-platform testing presents unique challenges due to the diversity and complexity of environments on which the application must be tested—remain among the most relevant problems, in all the three considered iterations. In particular, the identification of test objects is faced with several strategies such as (i) object recognition engines (i.e., identification of testing elements in the GUI); (ii) robust element localization (e.g., use of multiple sources to localize elements in the GUI); (iii) visual testing (i.e., automated visual checks of the GUI by using of computer vision); and (iv) intelligent fault prediction strategies.

The Sankey diagram represented in Figure 6 shows that several different problems seem to affect the test execution phase. Among the various problems, the most significant and those that attract the community’s attention seem to be flakiness and untested code. In the last iteration (see Table 2), flakiness—flakiness in tests occurs when test results are unreliable, showing varying outcomes across multiple runs even though the application state remains unchanged—appears to be recognized as less relevant compared to the first and second iteration. Conversely, the problem of identifying the untested code is becoming more and more relevant with the second and third iteration. A multitude of intelligent mechanisms (e.g., fault prediction, code change analysis, smart locators, API generation, exploratory testing, and test generation) are adopted to increase code coverage during testing. In particular, the automatic generation of coverage reports is a key aspect for keeping developers and testers continuously informed about coverage information, enabling them to take compensatory actions if necessary. Another

notable issue in this phase is the lengthy execution time of test suites, which can be quite significant in some cases. The grey literature presents a variety of solutions for this problem, including ‘smart’ test execution approaches—smart test execution scans your application for code changes and runs tests specifically to validate those changes—, runtime monitoring, and the exclusion of non-essential test cases.

Figure 7 and Figure 8 respectively depict the relevant problems and the adopted solutions for test closure and maintenance using Sankey diagrams. Regarding test closure, the most relevant problem is still the manual overhead needed to debug the code. Two strategies can be identified among the provided solutions. On the one side, solutions such as root-cause analysis and automatic identification of code changes are proposed to identify and fix the issues by considering multiple information sources. On the other side, self-healing and intelligent analytic mechanisms are applied to avoid and predict issues, thus reducing the manual debugging overhead. Concerning test closure, in the three iterations, we also observed an increasing interest in techniques related to failure prediction and static code analysis, aiming at improving the code and data quality. The most significant problem in test maintenance is still the overhead involved. The strategies proposed in the solutions fall into three categories: (i) the development of self-healing test scripts and mechanisms to avoid costly maintenance interventions; (ii) the application of fault prediction and code change detection techniques to better target and minimize maintenance efforts; and (iii) the implementation of smart locators and robust element localization methods to prevent test maintenance activities. Other issues affecting test maintenance are automatically validating the visual correctness of the application and the fragility of tests. A solution to the

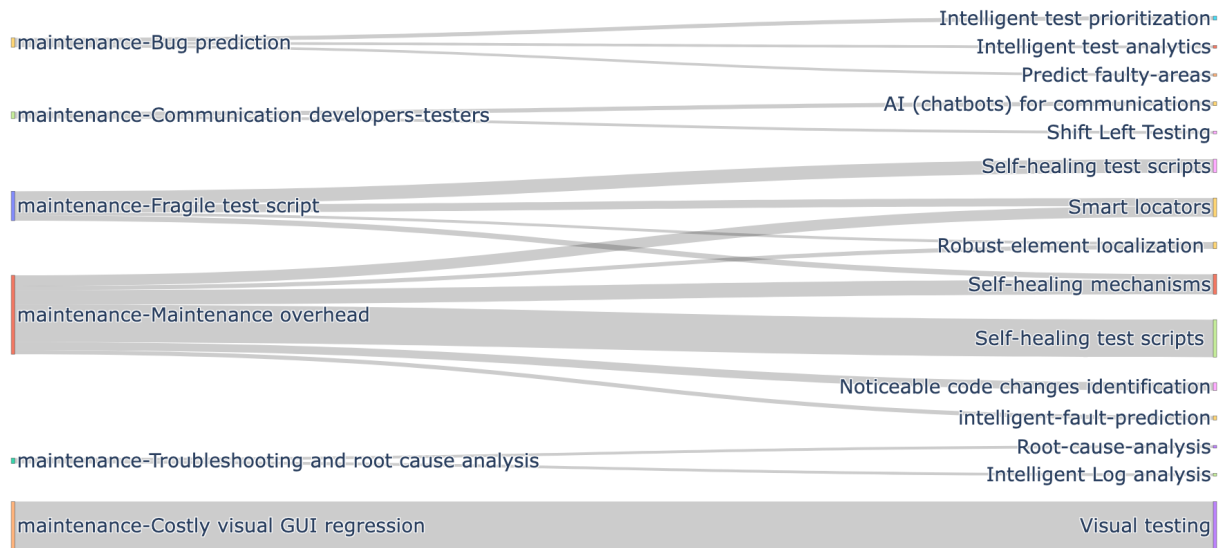


Figure 8: Problems vs Solutions: Test maintenance Sankey diagram.

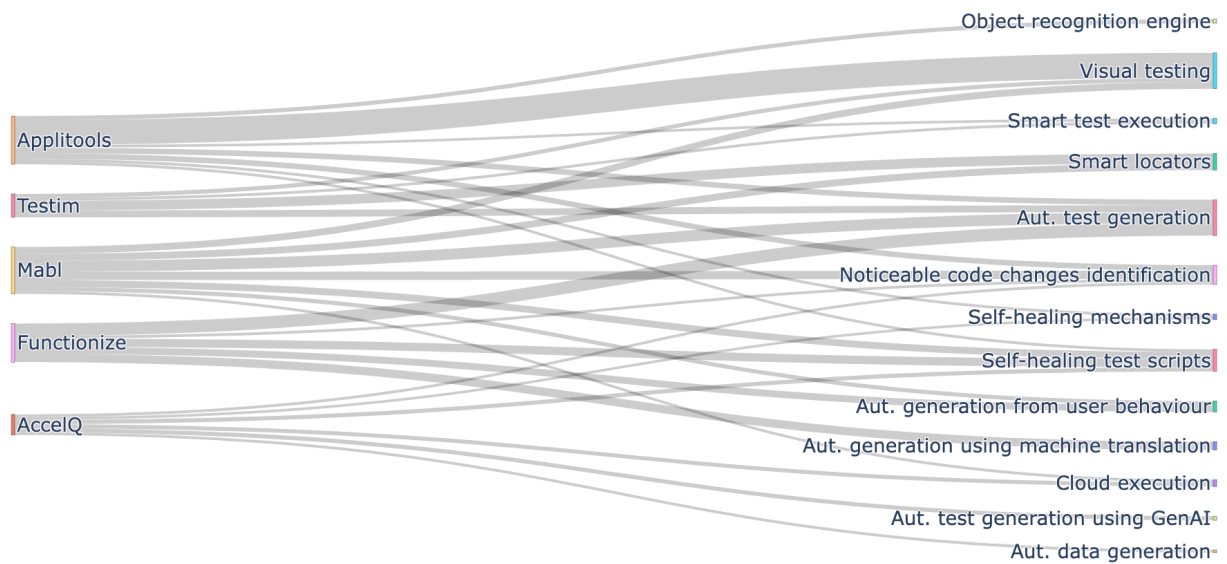


Figure 9: Tools vs Solutions: Sankey diagram.

problem of automatically validating the visual correctness of the application is automated visual verification of the web app GUI using computer vision techniques. Test fragility, defined as the tendency of tests to break easily due to minor changes in the application, can be addressed with various solutions, ranging from self-healing mechanisms to improving test script quality.

4.6. RQ₆ (Tools vs. Solutions)

Figure 9 presents a Sankey diagram featuring the five most frequently cited tools in the third iteration—Applitools, Testim, Mabl, Functionize, and AccelQ—as listed in Table 4. Each flow in the diagram represents a relationship identified in the analyzed documents between a tool (left node in the diagram) and the AI-based solutions (right node in the diagram) it supports, as listed in Table 3. We emphasize that, in our case, the size of the flows and nodes in the

diagram indicates relationships that are more comprehensively addressed in the analyzed documents. In the figure, it is evident that Functionize demonstrates notable strengths and diverse capabilities. Specifically, Functionize excels in using NLP and AI for automatic test generation and employs advanced techniques for self-healing test maintenance (see Figure 9). Similarly, Applitools provides flexibility and a comprehensive set of features. Notably, Applitools excels in visual testing and employs advanced strategies for automated test generation, including object recognition systems, user behavior observation, and generative AI mechanisms. Applitools provides also test maintenance (e.g., self-healing mechanisms, code change identification capability) and debugging features (e.g., root-cause analysis, and intelligent test analytics). In general, as we can also see from the figure, testing tools, and platforms are very flexible and support a wider range of solutions to different problems. However, there are exceptions, such as Appium and Testsigma (not present in the figure), which are more specialized and target a narrower set of capabilities.

5. Discussion

Observations and Evidences. By analyzing the results collected in the three iterations of our study, we derived the following observations and evidence.

- O1:** We can identify TA problems for which AI-enhanced existing solutions seem to be promising and largely studied. In particular, we observed that test authoring (i.e., test creation) is the most investigated TA problems. We identified 34 tools (e.g., Applitools, Functionize, Testim, Testrigor) that use AI-based technology for automatically generating test cases using different technologies, such as NLP techniques or GUI-based capture and reply techniques to automatically generate test scripts, aiming at limiting the manual human intervention. **O1** is of interest, in particular, for practitioners who could easily identify the problems better supported by existing tools, and also for researchers to identify unexplored problems for which propose innovative solutions.
- O2:** We can identify TA problems that could be faced by AI-enhanced existing solutions implemented in AI-based tools. For instance, a well-known challenge in GUI testing is the creation of effective oracles [35]. The use of oracles based on visual testing, using AI and computer vision approaches, is suggested in the grey literature as one of the possible ways to face this challenge. Furthermore, 13 tools that support oracle visual testing have been identified, e.g., Applitools, AI Testbot, Mabl, Sealights, Testim, and Test.ai. **O2** is of interest, in particular, for practitioners for quickly selecting the most appropriate solutions for their TA problems and the most adequate tools that support the solutions to their TA problems.
- O3:** We can identify TA problems that require solutions involving several phases of TA. For instance, in the test planning phase, we defined problems such as planning what to test, identifying critical paths in the application under test, and managing the entire test process, among others. We observe that the latter problem raised attention only recently (in the third iteration of our study), and it is faced by mainly applying AI data-driven decision strategies. The second problem is mainly faced with automatic test creation solutions, ranging from crawling the application under test to the creation of test scripts using user behaviors. The first problem instead is faced by solutions involving test script creation (e.g., automatic test creations by focusing on application areas that are predicted as more buggy), test selection (e.g., based on fault prediction), test execution (e.g., adoption of intelligent test re-execution strategies), and, finally, test debugging approaches (e.g., adoption of test analytics). **O3** is of interest, in particular, for researchers that can better highlight as some TA problems are addressed from different perspectives, i.e., for some problems, specific ad-hoc solutions can be adequate while, for other problems, more complex solutions need to be studied.
- O4:** We identified solutions presented in the grey literature that are not supported by existing available tools. For instance, nevertheless, test generation with mockups and dynamic properties identified from observed user behaviors are listed among possible solutions supported by AI, for automatically generating tests, we did not identify any existing tools that provided such capabilities. However, it is important to keep in mind that the absence of a tool does not necessarily indicate a lack of existing solutions for a particular problem. It could simply mean that the specific tooling solutions were not mentioned in the literature due to the incompleteness of our analysis. For instance, decoupling the test framework from the host environment is referenced, in the grey literature, as one possible solution for facilitating cross-platform testing. However, it seems that this solution is not adequately supported by the existing AI-enhanced tools, that mainly provide approaches that allow the identification of different environmental configurations, to face cross-platform testing. Another solution that seems to be not adequately supported by tools concerns the execution of test cases with mock responses: no tools support the construction of mock objects that can be used in TA. Concerning the test selection and optimization, solutions aiming at prioritizing test cases, removing unnecessary test cases and GUI-based testing seem to be not adequately supported by existing AI-enhanced tools. **O4** is of interest to both professionals and researchers to develop innovative tools and technologies capable of supporting the identified solutions.

O5: In general, we identified tools that support solutions across various phases of test automation and address multiple test automation problems. However, there are also, though less common, tools that are specific to a particular phase or problem. For instance, tools such as Applitools, Functionize, and Mabl are able to support different TA phases, e.g., test creation, maintenance, execution. Conversely, tools such as Appium, Testsigma, and TestComplete seem to be more specific, thus mainly supporting a given testing phase, e.g., Appium and Testsigma focus on test creation, while TestComplete focuses on visual testing. **O5** is of interest for practitioners for selecting the most appropriate tools to use in their business, by taking into account the problems they have to face and also other aspects such as specificity and flexibility of tools.

5.1. Threats to validity

This section discusses the limitations of this research and the validity of the results presented. The primary issues related to the validity of this grey literature review involve inaccuracies in data extraction, an incomplete set of studies due to the limitations of search terms and search engines, and potential researcher bias concerning the criteria for study inclusion and exclusion. In this section, we discuss four types of validity threats plus reproducibility according to a standard validity checklist [60].

Threats to *internal validity* relate to potential biases and errors in the selection of documents (exclusion criteria) and the classification of the considered items. The classification task is particularly challenging in the context of grey literature because web documents are often informative rather than technical, and the terminology used can be vague and ambiguous. To mitigate as much as possible classification errors, we adhered to a systematic and structured procedure (Section 3.1) with multiple iterations, starting with a small pilot study for each iteration and ensuring a consistent approach. Another potential threat to the internal validity of our grey literature review is the search string used in the review process. Modifications to the search string could lead to different results, highlighting a limitation of our approach. The search string we used was carefully designed, but any changes to it could yield different sets of documents, thus affecting the scope and findings of the review. This underscores the importance of a well-defined search strategy and acknowledges that our conclusions are based on the specific search parameters we employed.

The *external validity* of our study is primarily limited by our selection of sources. We considered only documents available on Google within a specific time frame. Consequently, our findings may not be generalizable to documents from other search engines, repositories, or different time periods. Future research should expand the scope to include additional sources and broader time frames to validate and extend our findings. However, given the number of documents analyzed and considering that the analysis was conducted at different times in three separate iterations, we are quite confident in our results.

Construct validity concerns the extent to which our methodology accurately captures the constructs of interest, such as the identification of AI-based solutions for test automation and their associated issues. The inherent vagueness and ambiguity in grey literature terminology pose a risk to construct validity. To address this, we defined clear criteria for inclusion and exclusion and employed a rigorous procedure with reliability checks through an initial pilot study conducted at each iteration.

Conclusion validity pertains to the degree to which our conclusions are credible and dependable. The iterative nature of our experiment, along with a pilot study conducted at each iteration, helps to ensure that our conclusions are based on systematically derived evidence. Nonetheless, the subjective nature of document interpretation in grey literature reviews remains a potential threat.

To enhance *reproducibility*, we have made all our results, including data, plots, and references, available in our replication package [45]. This transparency allows other researchers to verify our findings and procedure. However, the inherent variability in grey literature sources means that exact replication may be challenging. We encourage future researchers to apply our procedure in different contexts to assess its robustness and adaptability.

6. Developers Interviews

While grey literature provided valuable information for our study, the nature of these sources limits to suggestions on how to use AI for TA, without presenting concrete evidence of its practical application or usage details.

To get a more complete picture, we have conducted semi-structured interviews with five researchers/practitioners with various backgrounds and levels of expertise, focusing on the types of problems and solutions found in our taxonomies.

6.1. Interviews Design

We selected five developers/researchers from personal contacts using convenience sampling and conducted semi-structured interviews to understand whether they perceive AI as a valuable asset that aligns with their needs and objectives in their testing activities.

Table 5 provides details about the interviewees, including their position, expertise, and years of experience. Among the interviewed candidates the lowest value is 6 years and the highest is 20 years (median=14). Our pool includes professionals involved in strategic decision-making, as well as technical personnel and a researcher.

We conducted semi-structured interviews [51], integrating open-ended questions to gather unexpected insights and specific questions to maintain focus and assist interviewees. After obtaining background information on the interviewees' general and AI-specific experiences, we began our questioning. The first question was deliberately broad: "What types of AI have you been using in your work?". This approach aimed to introduce the topic openly, encouraging interviewees to discuss their experiences without steering them toward any particular problems/solutions.

Table 5
Interview participants details.

Participant	# Position	# Expertise	# Experience
Id1	Q/A Manager	Q/A Strategy	17+ years
Id2	Senior Developer	Quality Monitoring	6+ years
Id3	Senior Developer	Data Science/LLMs	10+ years
Id4	Full Stack Developer	TA/DevOps	14+ years
Id5	Researcher	QA/Testing	20+ years

We then proceeded to more specific questions covering a wide range of topics in test automation, including test creation, maintenance, execution, and the tools used. We asked interviewees if they had encountered any issues or problems related to these topics. If they responded affirmatively, we provided more detailed questions to better understand the discussed topic.

All interviews were conducted remotely via Teams video calls, each lasting approximately 60 minutes. The interviews were transcribed using Teams' automated speech recognition tool, which converts audio/video files into text. After generating the automated transcriptions, we reviewed and manually corrected transcription errors. Finally, we proceeded with open coding of the transcribed interviews in which different parts of the transcribed text were tagged.

6.2. Interviews Results

6.2.1. Problems

The participants highlighted the use of AI to enhance test execution, specifically through test prioritization and AI-assisted test refactoring. On a broader picture, AI was leveraged to analyze existing codebases for predictive maintenance and risk assessment. This approach helped reduce technical debt and maintenance challenges caused by the low skill levels of consultants that exhibit high turnover.

In end-to-end testing, the interviewees mentioned that a primary challenge is testability. The lengthy and complex nature of E2E test cases makes testing at the API level very difficult, especially without a clear specification. E2E tests are often fragile due to the lack of an API, the absence of static checking, synchronization issues, and missing types. Creating a model for these tests is considered a valuable investment, as it can result in more maintainable and robust tests, especially if the web app model creation and maintenance can also be automated.

6.2.2. Solutions

The participants emphasized the use of AI for identifying dependencies between services and detecting obsolete test cases due to the lack of domain knowledge in complex codebases. Another proposed solution is to implement anomaly detection using test execution logs to monitor the system and production data to help anticipate failures before they occur. An interesting case was the usage of LLMs for mutation testing: when new test cases were introduced in the test suite, the web app was modified with artificially generated faults to assess the quality of the evolved test suite.

Regarding self-healing in practice, the participants were quite critical, noting that not all issues can be "self-healed". They suggested limiting self-healing to bug classes that can be precisely described, otherwise bugs can go unnoticed. Some changes, such as updated IDs, can be managed with hash maps to fix mappings automatically or by rewriting page objects if there are changes.

Ultimately, the participants see AI as a collaborative partner in testing, code review, and pair programming. With accountability resting on the developers, they write the tests (serving as specifications), while the AI generates the code. The final message was to use AI to generate boilerplate code while keeping decision-making a human task.

6.2.3. Tools

The interviewees described employing a diverse collection of AI algorithms in their work. These range from traditional machine learning algorithms, such as Support Vector Machines (SVM) and decision trees. An interview mentioned "conventional AI" strategies such as search-based optimization algorithms, model-based approaches such as user interaction flows, or Markov Chain Monte Carlo for prioritizing tests and tracking the frequency of test changes. The participants also mentioned the usage of computer vision techniques like object recognition to find web elements that are difficult to find in the DOM, internationalization (I18n) testing, or automating the visual oracle in tests.

Our participants highlighted their reliance on in-house tools and existing frameworks, over custom code bases that are hard to adapt to each specific customer's need. They also noted the integration of advanced generative AI models, such as OpenAI's ChatGPT and Microsoft's Copilot, into their daily activities for code generation and review.

6.2.4. Open Challenges of AIaTA

We questioned whether AI is merely a more sophisticated form of traditional automation or a transformative technology that is here to stay. The consensus was largely positive, particularly regarding large language models. However, these tools require strict guidelines for junior developers, who might overly depend on their outputs without proper verification. Indeed, LLMs are prone to hallucinations, where the output appears plausible but is largely incorrect. For test data generation, the creativity aspect of large language models can create interesting and useful test data in situations where optimization methods like fuzzing are not applicable. However, a clear limitation is AI's lack of domain knowledge. While AI can access vast amounts of data, it lacks specific domain or company-specific knowledge, making the pre-trained models insufficient.

As such, our participants emphasized developing self-check mechanisms and best practices for using AI in TA. LLMs often attempt to create solutions rather than acknowledging uncertainty. LLMs have a user-pleasing tendency, finding workarounds instead of reporting errors (obviating the oracle problem). This can lead to excessively positive

results, while testers typically adopt a more cautious, critical, and pessimistic perspective. Our interviews revealed that quality is not just about coverage; relevance and better assertions are crucial to avoid potential risks in production.

Other research areas that deserve attention include human-computer interaction, focusing on ensuring that the results of AI are clear and explainable. Additionally, developing quality metrics to assess the output of AI models is essential, such as measuring the frequency of hallucinations accurately or evaluating the quality of the output they produce.

7. Related Work

This section of related works is divided into three subsections: 1) works where AI and ML are applied to TA, 2) analyses of grey literature in the context of test automation and multivocal literature reviews, and 3) secondary studies focused on AIaTA.

7.1. Artificial Intelligence in Test Automation

In the software testing community, AI/ML solutions are increasingly adopted to automate various testing activities (e.g., test data generation) and address issues such as test suite maintenance and test case prioritization, ushering in a new era of smarter and more efficient QA processes. Test generation is a significant area where AI/ML has been explored. Zhang et al. [63] and Walia et al. [58] propose, using computer vision, approaches to automate GUI test generation, aiming to reduce human effort. Qian et al. [42] adopt an OCR-based technique to localize GUI elements for test generation. Test maintenance, which traditionally requires significant human effort (e.g., for page object generation [54]), can also benefit from AI/ML. Computer vision approaches [2] have been widely used for web test migration [29, 27, 53] and test repair. Code-less functional test automation is investigated by Vos et al. [57] and Phuc Nguyen et al. [40] for test maintenance. The latter paper combines Selenium and ML techniques to reduce the time testers spend modifying test code. Other testing issues addressed by AI/ML include ML-based detection of flaky tests (Camara et al. [6]), cross-browser incompatibility detection (Mahajan et al. [32]), test case prioritization (Feng et al. [9]), and identifying areas of the application under test for increased test coverage such as the work by Yadav et al. [62]. Unlike these works, our study does not focus on a specific AI/ML technique for test automation. Instead, we conduct a multi-year grey literature review to capture the state-of-the-art concerning test automation problems, proposed solutions, and existing tools.

7.2. Grey Literature and Multivocal Literature Reviews on Test Automation

One of the early works in grey literature analysis on Test Automation is that of Päivi Raulamo-Jurvanen and colleagues [44]. In this paper, the researchers investigate how practitioners address the challenge of selecting the appropriate test automation tool. Their methodology involves consolidating insights from practitioners through a review

of grey literature sourced from 53 distinct companies. The findings reveal a shared understanding of important selection criteria, albeit with inconsistent application. To address this, the authors distill insights from various sources into a cohesive 12-step process and identify 14 distinct criteria for effective tool selection. The study indicates that practitioners generally exhibit a keen interest in and are influenced by related grey literature, as evidenced by the substantial number of backlinks to the sources. Despite the abundance of available software testing tools, practitioners tend to gravitate towards well-known and widely adopted options (e.g., Selenium, QTP/UFT, and TestComple). This work, although its objective differs from ours, shares similarities.

Another work falling into this category is that of Yuqing Wang et al. [59]. In their paper, the authors present a multivocal literature review aimed at surveying and synthesizing guidelines from existing literature on enhancing test automation maturity. A multivocal literature review is a type of systematic literature review that includes both academic literature and grey literature. They conducted a review of 81 primary studies. From these studies, they extracted 26 test automation best practices and collected various pieces of advice on how to implement them effectively. The main observations include: (1) Only 6 best practices have been empirically evaluated for their positive impact on maturity improvement; (2) Some technical best practices identified in the review were not previously included in test maturity models; (3) Certain best practices correlate with success factors and maturity impediments identified by other researchers; (4) Many pieces of advice on implementing best practices are derived from experience studies and require further empirical evaluation using formal methods; (5) Some advice on implementing certain best practices conflicts in the literature. The objective of this work is completely different from ours, and also the research method is different (multivocal literature review vs. grey literature analysis).

The last work we have selected in this category is that of Garousi and Mäntylä [12]. The study investigates decision-making in software test automation within the context of software development and tries to answer the question: when and what to automate in software testing? While many organizations view test automation as a means to cut costs and expedite development, its effectiveness depends on various factors like timing, context, and approach. To address this, the researchers conducted a multivocal literature review of 78 sources, including formal and grey literature. They categorized factors influencing automation decisions into five groups and identified prevalent ones such as regression testing needs, economic factors, and SUT maturity. The study concludes that current decision-support in software test automation offers reasonable advice for the industry. As a practical outcome, the findings have been synthesized into a checklist for practitioners. However, there is a recommendation to develop systematic, empirically validated decision-support approaches, as existing advice often lacks systemization and is based on weak empirical evidence. Our work differs from this one in terms of goals and research

method, but we share with it the procedure of grey literature analysis, which we took inspiration from for our study.

7.3. Secondary Studies on AI in Test Automation

In the literature, there are numerous reviews and surveys focusing on Test Automation via AI/ML. For instance, Trudova et al. [56] conducted a systematic literature review to explore the role of AI/ML in TA. Their findings based on 34 primary studies on AI implementation in software testing reveal that most studies in the literature investigate the application of ML and computer vision techniques to reduce manual intervention in software testing and enhance the effectiveness and reusability of test suites. In particular, the activities which could be improved by the adoption of AI techniques are as follows: test case generation, test oracle generation, test execution, test data generation, test results reporting, test repair, test case selection, flaky test prediction, and test order generation. Also in their case, as in our analysis, the analyzed papers mainly addressed test case generation.

The study conducted by Lima et al. [30] presents a concise overview of the current state of software testing, with a specific focus on the integration of ML and AI algorithms. It evaluates the progress made in AI and ML techniques for software testing over the last three years, drawing from databases including Scopus Elsevier, Web of Science, and Google Scholar. The algorithms are classified into white-box, grey-box, and black-box testing, with an examination of their respective application domains. The authors conclude that black-box testing emerges as the predominant approach in software testing involving AI. Furthermore, within black-box testing, all three ML methods—supervised, unsupervised, and reinforcement learning—are commonly utilized. Notably, techniques such as clustering, Artificial Neural Networks, and Genetic Algorithms find extensive use in tasks such as fuzzing and regression testing. Differently from this study, which aims to infer the AI and ML algorithms used in software testing, we focused on other aspects as well because grey literature is more descriptive and often lacks technical details.

Our work falls within the scope of these secondary studies. Unlike previous works, we focused on the grey literature to gain insights into practitioners' perceptions of AI/ML adoption in TA. Moreover, we validated and extended our taxonomies with interviews with industrial professionals.

8. Conclusions and Future Work

Artificial intelligence proposes to revolutionize the way we develop and test software systems. Novel tools and testing platforms are being proposed every year, however, to date, little is still known about AI-based test automation, what problems it addresses, what solutions it offers, what tools are available, and for what scope.

To fill this gap, in this paper, we present a multi-year study of the grey literature concerning AI solutions for test automation. We manually analyzed several thousands of documents from which we retrieved many problems about

different aspects of the automated testing process. Moreover, our taxonomy includes the solutions that are used to mitigate such problems and the list of the most popular tools available. Our taxonomies were validated by five interviews with industrial practitioners, who also provided further insights about the usage of AI in TA.

Future research directions consist of conducting a multi-vocal literature review by integrating the findings gathered from the grey literature with those of the white literature. It would be also interesting to conduct controlled experiments with existing AI-enhanced tools, to quantify the benefits they provide and to validate the observed connections with the TA problems and the investigated solutions.

9. Acknowledgments

We extend our deepest gratitude to the professionals who generously took the time to participate in our interviews.

References

- [1] Amalfitano, D., Faralli, S., Hauck, J.C.R., Matalonga, S., Distanto, D., 2023. Artificial intelligence applied to software testing: A tertiary study. *ACM Comput. Surv.* 56. URL: <https://doi.org/10.1145/3616372>, doi:10.1145/3616372.
- [2] Bajammal, M., Stocco, A., Mazinianian, D., Mesbah, A., 2020. A Survey on the Use of Computer Vision to Improve Software Engineering Tasks. *TSE*.
- [3] Bishop, C.M., 2006. *Pattern Recognition and Machine Learning (Information Science and Statistics)*. Springer-Verlag, Berlin, Heidelberg.
- [4] Borjesson, E., Feldt, R., 2012. Automated system testing using visual gui testing tools: A comparative study in industry, in: 2012 IEEE Fifth International Conference on Software Testing, Verification and Validation, pp. 350–359. doi:10.1109/ICST.2012.115.
- [5] Brader, L., 2013. Testing for Continuous Delivery with Visual Studio 2012 (Microsoft patterns & practices). *Microsoft patterns & practices*.
- [6] Camara, B., Silva, M., Endo, A., Vergilio, S., 2021. On the use of test smells for prediction of flaky tests, *Association for Computing Machinery*. p. 46–54.
- [7] Contan, A., Dehelean, C., Miclea, L., 2018. Test automation pyramid from theory to practice, in: 2018 IEEE International Conference on Automation, Quality and Testing, Robotics (AQTR), pp. 1–5. doi:10.1109/AQTR.2018.8402699.
- [8] Durelli, V.H.S., Durelli, R.S., Borges, S.S., Endo, A.T., Eler, M.M., Dias, D.R.C., Guimarães, M.P., 2019. Machine learning applied to software testing: A systematic mapping study. *IEEE Transactions on Reliability* 68, 1189–1212. doi:10.1109/TR.2019.2892517.
- [9] Feng, Y., Jones, J.A., Chen, Z., Fang, C., 2016. Multi-objective test report prioritization using image understanding, in: *Proceedings of 31st IEEE/ACM International Conference on Automated Software Engineering*, ACM, New York, NY, USA. pp. 202–213.
- [10] Garousi, V., Elberzhager, F., 2017. Test automation: Not just for test execution. *IEEE Software* 34, 90–96. doi:10.1109/MS.2017.34.
- [11] Garousi, V., Felderer, M., Mäntylä, M.V., 2019. Guidelines for including grey literature and conducting multivocal literature reviews in software engineering. *IST* 106, 101–121.
- [12] Garousi, V., Mäntylä, M.V., 2016. When and what to automate in software testing? a multi-vocal literature review. *IST* 76, 92–117.
- [13] Graham, D., Fewster, M., 2012. *Experiences of Test Automation: Case Studies of Software Test Automation*. 1st ed., Addison-Wesley Professional.
- [14] Gyimesi, P., Vancsics, B., Stocco, A., Mazinianian, D., Árpád Beszédes, Ferenc, R., Mesbah, A., 2020. BugJS: A benchmark and

- taxonomy of javascript bugs. *Software Testing, Verification And Reliability*.
- [15] Harman, M., 2012. The role of artificial intelligence in software engineering, in: 2012 First International Workshop on Realizing AI Synergies in Software Engineering (RAISE), pp. 1–6. doi:10.1109/RAISE.2012.6227961.
- [16] Hourani, H., Hammad, A., Lafi, M., 2019. The impact of artificial intelligence on software testing, in: 2019 IEEE Jordan International Joint Conference on Electrical Engineering and Information Technology (JEEIT), pp. 565–570. doi:10.1109/JEEIT.2019.8717439.
- [17] Inc., P.T., 2015. Collaborative data science. URL: <https://plot.ly>.
- [18] Jha, N., Popli, R., 2021. Artificial intelligence for software testing-perspectives and practices, in: CCICT '21, pp. 377–382.
- [19] Kim, M., Xin, Q., Sinha, S., Orso, A., 2022. Automated test generation for rest apis: no time to rest yet, in: Proceedings of the 31st ACM SIGSOFT International Symposium on Software Testing and Analysis, Association for Computing Machinery, New York, NY, USA. p. 289–301. URL: <https://doi.org/10.1145/3533767.3534401>, doi:10.1145/3533767.3534401.
- [20] Krichen, M., 2023. How artificial intelligence can revolutionize software testing techniques, in: Abraham, A., Bajaj, A., Gandhi, N., Madureira, A.M., Kahraman, C. (Eds.), *Innovations in Bio-Inspired Computing and Applications*, Springer Nature Switzerland, Cham. pp. 189–198.
- [21] Leger, G., Barragan, M.J., 2018. Mixed-signal test automation: Are we there yet?, in: 2018 IEEE International Symposium on Circuits and Systems (ISCAS), pp. 1–5.
- [22] Leinen, F., Elsner, D., Pretschner, A., Stahlbauer, A., Sailer, M., Jürgens, E., 2024. Cost of flaky tests in continuous integration: An industrial case study, in: 2024 IEEE Conference on Software Testing, Verification and Validation (ICST).
- [23] Leotta, M., Clerissi, D., Ricca, F., Tonella, P., 2013. Capture-replay vs. programmable web testing: An empirical assessment during test case evolution, in: Proceedings of 20th Working Conference on Reverse Engineering, IEEE Computer Society. pp. 272–281.
- [24] Leotta, M., Clerissi, D., Ricca, F., Tonella, P., 2016a. Approaches and tools for automated end-to-end web testing. *Advances in Computers* 101, 193–237.
- [25] Leotta, M., Garcia, B., Ricca, F., Whitehead, J., 2023a. Challenges of end-to-end testing with selenium webdriver and how to face them: A survey, in: Proceedings of the 16th IEEE International Conference on Software Testing, Verification and Validation, pp. 339–350.
- [26] Leotta, M., Ricca, F., Marchetto, A., Olianias, D., 2023b. An empirical study to compare three web test automation approaches: Nlp-based, programmable, and capture&replay. *J. Softw. Evol. Process* 36. URL: <https://doi.org/10.1002/smr.2606>, doi:10.1002/smr.2606.
- [27] Leotta, M., Stocco, A., Ricca, F., Tonella, P., 2015. Automated migration of DOM-based to visual web tests, in: Proceedings of 30th Symposium on Applied Computing, ACM. pp. 775–782.
- [28] Leotta, M., Stocco, A., Ricca, F., Tonella, P., 2016b. ROBULA+: An algorithm for generating robust XPath locators for web testing. *Journal of Software: Evolution and Process*, 28:177–204.
- [29] Leotta, M., Stocco, A., Ricca, F., Tonella, P., 2018. PESTO: Automated migration of DOM-based web tests towards the visual approach. *Software Testing, Verification And Reliability* 28.
- [30] Lima, R., da Cruz, A.M.R., Ribeiro, J., 2020. Artificial intelligence applied to software testing: A literature review, in: 2020 15th Iberian Conference on Information Systems and Technologies (CISTI), pp. 1–6.
- [31] Luo, Q., Hariri, F., Eloussi, L., Marinov, D., 2014. An empirical analysis of flaky tests, in: Proceedings of the 22nd ACM SIGSOFT International Symposium on Foundations of Software Engineering, Association for Computing Machinery, New York, NY, USA. p. 643–653.
- [32] Mahajan, S., Halfond, W.G.J., 2015. Detection and localization of HTML presentation failures using computer vision-based techniques, in: Proceedings of 8th IEEE International Conference on Software Testing, Verification and Validation, pp. 1–10.
- [33] Massol, V., Husted, T., 2003. *JUnit in Action*. Manning Publications Co., USA.
- [34] McKinney, W., et al., 2010. Data structures for statistical computing in python, in: Proceedings of the 9th Python in Science Conference, Austin, TX. pp. 51–56.
- [35] Memon, A., Banerjee, I., Nagarajan, A., 2003. What test oracle should i use for effective gui testing?, in: 18th IEEE International Conference on Automated Software Engineering, 2003. Proceedings., pp. 164–173.
- [36] Mesbah, A., Prasad, M.R., 2011. Automated cross-browser compatibility testing, in: Proceedings of the 33rd International Conference on Software Engineering, Association for Computing Machinery, New York, NY, USA. p. 561–570. URL: <https://doi.org/10.1145/1985793.1985870>, doi:10.1145/1985793.1985870.
- [37] Myers, G.J., Sandler, C., Badgett, T., 2011. *The Art of Software Testing*. 3rd ed., Wiley Publishing.
- [38] Nass, M., Alégroth, E., Feldt, R., 2021. Why many challenges with gui test automation (will) remain. *Information and Software Technology* 138, 106625. URL: <https://www.sciencedirect.com/science/article/pii/S0950584921000963>, doi:https://doi.org/10.1016/j.infsof.2021.106625.
- [39] Pham, P., Nguyen, V., Nguyen, T., 2023. A review of ai-augmented end-to-end test automation tools, in: Proceedings of the 37th IEEE/ACM International Conference on Automated Software Engineering, Association for Computing Machinery, New York, NY, USA. URL: <https://doi.org/10.1145/3551349.3563240>, doi:10.1145/3551349.3563240.
- [40] Phuc Nguyen, D., Maag, S., 2020. Codeless web testing using Selenium and machine learning, in: ICSoft 2020: 15th International Conference on Software Technologies, ScitePress, Online, France. pp. 51–60.
- [41] Polo, M., Reales, P., Piattini, M., Ebert, C., 2013. Test automation. *IEEE Software* 30, 84–89. doi:10.1109/MS.2013.15.
- [42] Qian, J., Ma, Y., Lin, C., Chen, L., 2023. Accelerating OCR-Based Widget Localization for Test Automation of GUI Applications. Association for Computing Machinery.
- [43] Rafi, D.M., Moses, K.R.K., Petersen, K., Mäntylä, M., 2012. Benefits and limitations of automated software testing: Systematic literature review and practitioner survey. 2012 7th International Workshop on Automation of Software Test (AST), 36–42.
- [44] Raulamo-Jurvanen, P., Mäntylä, M., Garousi, V., 2017. Choosing the right test automation tool: A grey literature review of practitioner sources, in: Proc. of the 21st International Conference on Evaluation and Assessment in Software Engineering, ACM. p. 21–30.
- [45] rep-pack, 2024. Replication Package. <https://github.com/riccaF/grey-literature-review-ai-test-automation>.
- [46] Ricca, F., Leotta, M., Stocco, A., 2018. Three open problems in the context of e2e web testing and a vision: Neonate. *Advances in Computers*.
- [47] Ricca, F., Marchetto, A., Stocco, A., 2021. AI-based Test Automation: A Grey Literature Analysis, in: Proceedings of 14th IEEE International Conference on Software Testing, Verification and Validation Workshops, Springer.
- [48] Ricca, F., Marchetto, A., Stocco, A., 2023. A retrospective analysis of grey literature for ai-supported test automation, in: Fernandes, J.M., Travassos, G.H., Lenarduzzi, V., Li, X. (Eds.), *Quality of Information and Communications Technology*, Springer Nature Switzerland, Cham. pp. 90–105.
- [49] Ricca, F., Stocco, A., 2021. Web test automation: Insights from the grey literature, in: Proceedings of 47th International Conference on Current Trends in Theory and Practice of Computer Science, Springer.
- [50] Schmidt, M., 2008. The sankey diagram in energy and material flow management. *Journal of Industrial Ecology* 12, 173–185.
- [51] Seaman, C., 1999. Qualitative methods in empirical studies of software engineering. *IEEE Transactions on Software Engineering* 25, 557–572. doi:10.1109/32.799955.
- [52] Selenium, 2020. SeleniumHQ web browser automation. <https://www.selenium.dev/>. Accessed: 2020-07-22.

- [53] Stocco, A., Leotta, M., Ricca, F., Tonella, P., 2014. PESTO: A tool for migrating DOM-based to visual web tests, in: Proceedings of 14th International Working Conference on Source Code Analysis and Manipulation, IEEE Computer Society. pp. 65–70.
- [54] Stocco, A., Leotta, M., Ricca, F., Tonella, P., 2017. APOGEN: Automatic Page Object Generator for Web Testing. *Software Quality Journal* 25, 1007–1039.
- [55] Stocco, A., Yandrapally, R., Mesbah, A., 2018. Visual web test repair, in: Proceedings of the 26th ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering, ACM.
- [56] Trudova, A., Dolezel, M., Buchalceva, A., 2020. Artificial intelligence in software test automation: A systematic literature review, in: Proceedings of the 15th Int. Conf. on Evaluation of Novel Approaches to Software Engineering - Vol. 1: ENASE, INSTICC. SciTePress. pp. 181–192. doi:10.5220/0009417801810192.
- [57] Vos, T.E.J., Aho, P., Pastor Ricos, F., Rodriguez-Valdes, O., Mulders, A., 2021. Testar – scriptless testing through graphical user interface. *Software Testing, Verification and Reliability* 31, e1771.
- [58] Walia, R., 2022. Application of machine learning for gui test automation, in: 2022 XXVIII International Conference on Information, Communication and Automation Technologies (ICAT), pp. 1–6.
- [59] Wang, Y., Mäntylä, M.V., Liu, Z., Markkula, J., Raulamo-jurvanen, P., 2022. Improving test automation maturity: A multivocal literature review. *Software Testing, Verification and Reliability* 32. URL: <http://dx.doi.org/10.1002/stvr.1804>, doi:10.1002/stvr.1804.
- [60] Wohlin, C., Runeson, P., Höst, M., Ohlsson, M., Regnell, B., Wesslén, A., 2000. *Experimentation in Software Engineering - An Introduction*. Kluwer Academic Publishers.
- [61] Wong, W., Horgan, J., London, S., Agrawal, H., 1997. A study of effective regression testing in practice, in: Proceedings The Eighth International Symposium on Software Reliability Engineering, pp. 264–274. doi:10.1109/ISSRE.1997.630875.
- [62] Yadav, V., Botchway, R.K., Senkerik, R., Kominkova, Z.O., 2021. Robot testing from a machine learning perspective, in: 2021 International Conference on Electrical, Computer and Energy Technologies (ICECET), pp. 1–4.
- [63] Zhang, C., Cheng, H., Tang, E., Chen, X., Bu, L., Li, X., 2017. Sketch-guided GUI Test Generation for Mobile Applications, in: Proc. of ASE '17, pp. 38–43.